



<div style="float: left; border: 1px solid black; border-radius: 50%; padding: 10px; text-align: center; width: 150px; height: 100px; margin-right: 10px;">             O I P E MAY 02 2006 PTO           </div> <div style="clear: both;"></div> <div style="text-align: center;"> <b>TRANSMITTAL LETTER</b>  <b>(General - Patent Pending)</b> </div>				Docket No. <b>AYL-10-PCT</b>	
In Re Application Of <b>LAURENCE J. AYLING</b>					
Application No. <b>10/510,316</b>	Filing Date <b>2 OCTOBER 04</b>	Examiner <b>UNKNOWN</b>	Customer No.	Group Art Unit <b>UNKNOWN</b>	Confirmation No.
Title: <b>IMPROVED SLIPS</b>					
<u>COMMISSIONER FOR PATENTS:</u>					
Transmitted herewith is:					
<b>CERTIFIED COPY OF PRIORITY UK APPLICATION 02 07908.</b>					
in the above identified application.					
<input checked="" type="checkbox"/> No additional fee is required.					
<input type="checkbox"/> A check in the amount of _____ is attached.					
<input checked="" type="checkbox"/> The Director is hereby authorized to charge and credit Deposit Account No. <b>50-0765</b> as described below.					
<input type="checkbox"/> Charge the amount of _____					
<input type="checkbox"/> Credit any overpayment.					
<input checked="" type="checkbox"/> Charge any additional fee required.					
<input type="checkbox"/> Payment by credit card. Form PTO-2038 is attached.					
<b>WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.</b>					
 _____ <i>Signature</i>			Dated: <b>27 APRIL 06</b>		
<div style="border: 1px solid black; padding: 5px;">         I hereby certify that this correspondence is being deposited with the United States Postal Service with sufficient postage as first class mail in an envelope addressed to the "Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450" [37 CFR 1.8(a)] on  <div style="text-align: center;"> <b>27 APRIL 06</b>            _____            (Date)         </div> <div style="text-align: center;">             _____            Signature of Person Mailing Correspondence         </div> <div style="text-align: center;"> <b>R.B. SHERER</b>            _____            Typed or Printed Name of Person Mailing Correspondence         </div> </div>					
CC:					

**THIS PAGE BLANK (USPTO)**



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

## CERTIFIED COPY OF PRIORITY DOCUMENT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1985 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 18 October 2004

**THIS PAGE BLANK (USPTO)**

## Patents Form 1/77

Patents Act 1977  
(Rule 16)05APR02 E70895-1 C04150  
P01/7700 0.00-0207908.5

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

## 1. Your reference

493

## 2. Patent application number

(The Patent Office will fill in this part)

05 APR 2002

0207908.5

## 3. Full name, address and postcode of the or of each applicant (underline all surnames)

06895941001

Patents ADP number (if you know it)

MARIS TDM LIMITED  
KNIGHTWAY HOUSE  
PARK STREET  
BAGSHOT  
SURREY GU19 5AQ

If the applicant is a corporate body, give the country/state of its incorporation

## 4. Title of the invention

IMPROVED SLIPS

## 5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

06963557001

Patents ADP number (if you know it)

COHEN, ALAN NICOL  
2 GROVE PLACE  
TATSFIELD  
Nr. WESTERHAM  
KENT  
TN16 2BB

## 6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)Date of filing  
(day / month / year)

## 7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earliest application

Date of filing  
(day / month / year)

## 8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d).

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

14

Claim(s)

3

Abstract

1 DM

Drawing(s)

8 only

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents  
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature



Date

05/04/04

12. Name and daytime telephone number of person to contact in the United Kingdom

A. N. Cohen

01959 577172

**Warning**

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

**Notes**

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

Improved Slips As Filed  
5-Apr 02 - 15:11

- 1 -

### Improved Slips

The present invention relates to improved slips for use in drilling.

- 5      When drilling with jointed drill pipe, the drill string (string of connected drill pipes), within the well bore has to be supported at the level of the drill floor to allow the Top Drive, or Kelly, to be disconnected from it whenever a tubular is being added or removed from the drill string.
- 10     Conventionally this is achieved by 'setting the string in the slips'. The slips are wedges that are placed around the drill string and sit in, or are wedged into, the conical shaped bowl of the rotary bushings contained in the rotary table located in the drill floor, around the centre line of the well bore.
- 15     The gripping action of the slips is mainly caused by the weight of the drill string dragging the slips further into the bowl. Drill pipe slip assemblies are designed to allow supporting of an oil well drill string at virtually any location along the length of the drill string. In this way, the drill pipe and suspended weight can be repeatedly moved up or down and secured structurally to the drill floor as needed during drilling
- 20     operations. The slip assemblies are typically composed of a "bowl" which is located in the rotary table that includes a tapered bore. The tapered bore is such that the bowl is smaller in diameter at the bottom than the top. Within the tapered bore, a plurality of (typically three) long circumferential gripping assembly segments are located that are formed with an outer taper that matches the tapered bore of the bowl. These slip
- 25     segments are interconnected by hinges so that the segments maintain a consistent axial relation to one another and may be simply opened and lifted away from the pipe either mechanically or by rig workers when not needed.

30     The slip segments with gripping assemblies, when installed in the slips bowl, form a cylindrical hole in the centre that is roughly the same size as the drill pipe body. The

504 Improved Slips As Filed.  
5-Apr-02 15:11

- 2 -

slips segments with gripping assemblies are either mechanically or manually lowered into the annular area between the bowl and the drill string when it is desired to suspend the drill string. The assembly naturally grips onto the pipe as it is wedged in the annular taper angle formed between the bowl and the slip segments. (Carriage  
5 return)

Within each circumferential slip segment, multiple hardened "dies" are located for contact with the drill pipe surface. In one known example, there are three axial rows of six dies for a total of 18 hardened dies secured within each slip segment. These  
10 hardened dies typically include "tooth" profiles on the pipe interface surface that enhance the gripping capability of the dies on the pipe by actually penetrating the pipe surface slightly. The hardened dies are necessary because the contact stresses with the pipe can be quite high and the dies are subject to considerable wear. The gripping force that prevents axial, or rotational, motion of the drill string is thereby achieved  
15 more by indenting the surface, rather than by simple friction.

In normal operations the greater the weight of drill string being supported in the slips, the greater the gripping force. The gripping force is relieved by raising the drill string.

20 Sometimes it is required that the slips transfer torque to the drill string from the rotary table and this requires an adequate gripping force between the slips and the drill string. If there is inadequate weight of drill string to create the required gripping force it may be necessary to impose some downward force on the slips, for example hydraulically.

25 As the oil industry seeks to drill in ever-deeper offshore waters, the length and weight of the longest drill strings in service have increased accordingly as well as the weight of the suspended loads such as casing strings and liners. This increases the penetration of the slips teeth into the pipe surface.



Improved Slips As Filed  
5-Apr-02 15:11

- 3 -

As the tubular string is lowered to wedge the slips, the teeth of the inserts are dragged downwards and it is difficult not to scratch, scrape or gouge the surface of the tubular. Similarly, when raising the tubular to disengage the slips, scratching of the tubular surface can take place. Additionally, when torque is required, either to turn the drill string, or to prevent it turning, if there is insufficient gripping then circumferential scoring can occur on the tubular surface.

All such marking of the tubular surface produces sites that are vulnerable to corrosion and it also initiates cracking and stress fractures. This is particularly serious at the locations where the drill string is typically supported since these are the highest stress areas of the tubular, just off the upset of the tool joint, when being bent in curved well bores.

We have now devised slips which reduces or removes the movement of the teeth across the surface by enabling the teeth to approach or withdraw from, the surface of the tubular, at about 90 degrees to the axis of the tubular.

According to the invention there is provided slips comprising :

- (i) a slips bowl seatable in a table
- (ii) a plurality of pipe-gripping slips disposed in the slips bowl for radial movement therein
- (iii) a moving means for moving the slips radially whereby movement of the slips into or out of contact of a tubular located within said bowl is at about substantially ninety degrees to the tubular.

By about ninety degrees to the tubular is meant that the movement of the slips is initially and substantially directly away from the tubular. When disengaging the tubular it does not have to disengage at exactly ninety degrees so long as the teeth of the slips disengage the tubular with substantially no dragging of the teeth across the tubular. This is reversed on engaging the tubular.

504 Improved Slips & P11-d  
5-Apr-02 - 15:11

- 4 -

In existing slips the radial movement of the slips only takes place with vertical movement of the slips and it is this vertical movement of the slips which causes the scoring or marking of the surface of the tubular referred to above. With the slips of the present invention the initial radial movement of the slips away from a tubular gripped by the slips is carried out without any or with substantially no vertical movement of the slips, so the teeth of the slips are not dragged across the surface of the tubular. Correspondingly when a tubular is to be gripped by the slips the last movement of the slips when the slips contact the tubular is also carried out with substantially no vertical movement of the slips.

The moving means preferably comprises a wedge which contacts a sloping external surface of the slips i.e. the surface of the slips which does not contact the tubular, whereby moving the wedge over the said sloping surface causes radial movement of the slips. The wedge is moved by a wedge moving means, such as an hydraulic ram which acts on the wedge to move it over the surface of the slips.

In order to constrain the movement of the slips into or out of contact with the tubular so that this movement is at about substantially ninety degrees to the tubular there is preferably a link, with one end pivotally attached to the slips and the other end pivotally fixed, whereby the slips are substantially constrained by the link to move substantially at ninety degrees to the tubular at the moment of contacting or retracting from the tubular.

The present invention can be applied to a wider range of diameters by having a plurality of wedges with each slip, for example by adding a coarse wedge behind each slip such that the majority of the travel can be taken up by the coarse wedge before the slips are themselves wedged and such capability is, for example, necessary to adjust to worn tool joints and to a variety of diameters of drill strings, tubulars or tool joints. The slips can be made fail safe on loss of applied external force by adding ridges to the

Improved Slips As Filed  
5-Apr-02 15:11

- 5 -

coarse wedge, such that no acting friction slope within the slips assembly is at more than 1 in 6 (about 10 degrees) to the axis of the drill string, which is conventionally recognised to remain wedged until un-wedged by an externally applied force. Between the coarse wedge and the wedge moving means there is a fine wedge. By coarse  
5 wedge and fine wedge is meant that the angle of slope of the coarse wedge is greater than that of the fine wedge.

The slips bowl can be any conventional slips bowl and the bowl can be mounted in the rotary bushings or rotary table in the conventional way. If the slips are to rotate, a  
10 tubular held by the slips in the bowl can be rotated by the table.

The present invention can be applied where the conventional wedge shaped bowl is itself segmented and contained within an upside-down wedge shaped or conical bowl such that the movement of the inner segmented bowl, within the outer wedge shaped  
15 or conical bowl, allows the slips to accommodate an even greater range of diameters of drill strings, tubulars and tool joints.

There can be a second set of slips that interfere with the shoulder of the tool joint such that, once applied or set, the support of the drill string weight does not rely on  
20 friction, or indentation of the surface of the drill string, tubular or tool joint. This embodiment allows the gripping of the drill string, tubular or tool joint to be solely required to provide or resist torque, while the axial force is taken by the said second set of slips.

The slips bowl is a wedge shaped bowl into which the slips are wedged and in the  
25 present invention the bowl moves axially, in parallel with the drill string axis, while the drill string, tubular or tool joint remains static and the slips are forced into contact with the said drill string, tubular or tool joint with little or no relative motion in the direction of the axis of the drill string.

30

504 Transmitted File No Filed  
in Apr-02 - 15:11

- 6 -

5 The wedge shaped bowl and slips can be forced together by a known hydraulic pneumatic, mechanical or electrical force so that the minimum gripping force between the slips and the drill string, tubular or tool joint can be predetermined and the gripping force does not rely on the weight of the drill string to drag the slips into the bowl.

10 In this invention no motion of the drill string is required to achieve a minimum gripping force between the slips and the drill string, tubular or tool joint

Any relative motion between the slips and the drill string, tubular or tool joint, parallel to the axis of the drill string, is so limited that scratching, scoring or gouging of the surface of the drill string, tubular or tool joints is minimised or avoided.

15 The present invention can be applied to the supporting or gripping or restraining of pipes, drill pipes, drill strings, tubulars, tool joints, casings, or any assembly of tubular components, during their connection or disconnection or rotation or raising or lowering or assembly or dis-assembly, whether hanging within the well bore or outside the well bore, at any angle of inclination to the vertical. It can be applied to all drilling and workover rigs, in which it is required to support and/or grip the tubulars being

20 inserted or withdrawn from the well bore, usually in the vicinity of the rotary table.

The slips of the present invention can also be used in snubbing. Whenever a tubular has to be forced down into the well bore against the wellhead pressure, which could be as much as 5,000psi, or more, the action is called snubbing.

25 A suitable method to achieve snubbing is to grip the tubular with a mechanism similar to an upside down slip. In this case, also, it is valuable to ensure that the slips do not scratch, score or gouge the surface of the tubular. The present invention similarly achieves the desired relative motion between the slips and the tubular at the moment

30 that the slips impinges on, or retracts from, the tubular surface. The slips can be

- 7 -

applied upside down to achieve the snubbing of a tubular from one environment, into another at a higher pressure, such as from atmospheric pressure into a well bore under a higher pressure, or where the drill string is being forced out of the well bore instead of hanging within it usually above and on the axis of the rotary table.

5

It is a feature of the invention that it achieves a more positive and safer axial and/or torsional gripping and/or supporting of tubulars than is conventionally achieved, while avoiding damage to the tubular surfaces other than simple indentation.

10

As well as being used with tubulars the invention can be used in any application where rigid or flexible tubular components are to be gripped with minimum damage to their surface such as, for example, in pipe line or cable, laying or pulling, etc.

The invention is illustrated in the accompanying drawings in which:-

15

Figs 1 and 2 illustrates the application of the new slips motion to the rotary slips mounted in a drill floor and taking up minimum horizontal space.

Figs 3 and 4 illustrate the same application as in fig. 1 while taking up minimum vertical space

20

Figs. 5 and 6 illustrates the application of the new slips to snubbing

Fig. 7 shows an exploded view of an actuating mechanism of the slips of fig. 5

Figs. 8 to 10 show the use of a double wedge to accommodate tubulars of a wide range of diameters

25

Figs. 11 to 14 illustrate an embodiment in which the sliding of the slips is constrained and

Figs 15 to 18 illustrate the use of second slips

30

Referring to figures 1 and 2, the tubular (2) is held by slip (1) (fig.1), the slip (1) is held against the tubular (2) by wedge (9). There is a link (3) pivotably connected to the slip (1) by pin (6); the other end of the link (3) is supported by pin (4) held by

- 8 -

structure (5). There is link (7) also connected to pin (6) and connected to the wedge (9) via pin (8). The wedge (9) and structure (5) are both supported in bearings (10) and (11) to allow rotation, the wedge (9) is supported in the hydraulic ram arrangement (12).

5

In use to engage slips and go from the position of fig. 2 to the position of fig. 1, the hydraulic ram arrangement (12) moves wedge (9) upwards and acts on slips (1). The movement of the wedge (9) vertically over the slips (1), which do not substantially move vertically, forces the slips (1) to move inwards. Existing slips have to move vertically in order to move into the stationery wedge. In existing slips this vertical motion of the slips is achieved in one of two ways: In manually placed slips, the tubular is lowered so that the surface of the tubular catches on the teeth of the inserts and drags the slips into the wedge, thus producing 'upward' scoring of the tubular. If, however, there is a mechanical actuator, the tubular remains supported by the Top drive or Kelly, while the slips are forced downwards into the wedge and thereby produce downward scoring of the tubular. In the present invention the function of link (3) constrains the slips (1) to move substantially horizontally i.e. substantially perpendicular or ninety degrees to the tubular (2) and so would not act to score or scratch the surface of tubular (2).

20

Referring to figs. 3 and 4, the tubular (2) is held by slip (1) (fig.3), the slip (1) is held against the tubular (2) by wedge (9). There is a link (3) pivotably connected to the slip (1) by pin (6); the other end of the link (3) is supported by pin (4) held by structure (5). There is link (7) also connected to pin (6) and connected to the wedge (9) via pin (8). The wedge (9) and structure (5) are both supported in bearings (10) and (11) to allow rotation, the wedge (9) is supported by the lower end of the hydraulic ram arrangement (12).

25

In use to engage slips and go from the position of fig. 4 to the position of fig. 3 the hydraulic ram arrangement (12) moves wedge (9) upwards to act on slips (1). The link

30

- 9 -

(3) constrains the slips (1) to move substantially horizontally i.e. substantially perpendicular to the tubular (2) and so would not act to score or scratch the surface of tubular (2).

5 Referring to figs. 5 and 6 the tubular (2) is held by slip (1) (fig. 5), the slip (1) is held against the tubular (2) by wedge (9). There is a link (3) pivotably connected to the slip (1) by pin (6); the other end of the link (3) is supported by pin (4) held by structure (5). There is link (7) also connected to pin (6) and connected to the wedge (9) via pin (8). The wedge (9) and structure (5) are both supported in bearings (10) and (11) to  
10 allow rotation, the wedge (9) is supported by the lower end of the hydraulic ram arrangement (12).

In use to engage slips and go from the position of fig. 6 to the position of fig. 5 the hydraulic ram arrangement (12) moves wedge (9) downwards to act on slips (1). The  
15 link (3) constrains the slips (1) to move substantially horizontally i.e. substantially perpendicular to the tubular (2) and so would not act to score or scratch the surface of tubular (2).

Referring to fig. 7 this shows how the components used in fig. 5 are assembled.  
20

Referring to figs 8 to 10, the link (23) is pivotably connected to the slip (21) by pin (26); the other end of the link (23) is supported by pin (24) held by structure (25). There is link (27) also connected to pin (26) and connected to the wedge (29) via pin (28). The wedge (29) is supported by the lower end of the hydraulic ram arrangement  
25 (34). In use the slip moves from the position of fig. 8 to the position of fig. 10 where the slips (21) engage the tubular (22). The slips (21) is extended and forced against the tubular (22) by the two wedges (29 & 30). The wedge (30) is a coarse wedge i.e. the angle of slope of the wedge is larger than that of the fine wedge (29).

504 Improved Slip An Filed  
5-Apr-02 - 15:11

- 10 -

- There is a spring (31) between the wedges (29) and (30). The majority of the movement of the slip (21) towards the tubular (22), from Fig 8 to Fig 9, is caused by the simultaneous movement of both wedges (29 & 30) by the action of the hydraulic ram (34) on wedge (29). Once the slip (21) has contacted the tubular (22), only the
- 5 fine wedge (29) continues to move upwards, as in Fig 9 to Fig 10, until the necessary gripping force is applied to the tubular (22). The linkages in Figs 8 to 10 act in the same way as in Figs 1 & 2. The slip (21) is constrained by the new link (23) to impact on the tubular (22) at approximately 90° to the surface of the tubular (22).
- 10 The vertical motion of wedge (29) and the introduction of the new link (23) to constrain the slip (21) to move horizontally, or near horizontally, when slip (21) is in contact with tubular (22) are novel.
- The link (27) has a slotted end around pin (26) so that the slip (21) in Fig 9 is free to
- 15 move towards the tubular but this link (27) can withdraw the slip away from the tubular as shown in Fig 8.
- The inclusion of spring (31) is preferred in order to ensure that no slippage between coarse wedge (30) and the fine wedge (29) takes place until the slip (21) has reached
- 20 tubular (22). Thereafter, the fine wedge (29) provides the necessary gripping force between the slip (21) and the tubular (22).
- The slope of the surface between a conventional slip and the wedge shaped bowl behind it is at an angle of some 10 degrees to the axis of the tubular or, more usually,
- 25 a gradient of 1 in 6. This can be a suitable gradient of the slope of the wedge (9) in Figs 1 to 6 and/or the fine wedge (29) in Figs 8 to 10. However in Figs 8 to 10, the slope of the surface between the slip (21) and the coarse wedge (30) can be at a gradient of 1 in 3 or steeper, compared to the axis of the tubular (22).



5-APR-02 15:11  
5-APR-02 15:11

- 11 -

In Figs 8 to 10, the gripping force is dependant on the application of an applied force as shown, for example, by the hydraulic ram system (34).

5 It is known by experience that, in the general application of slips, a 1 in 6 gradient will remain wedged but a 1 in 3 gradient, or more, will not remain wedged.

10 It may be required to apply a 'fail safe' gripping force, such that it will continue despite a failure of the hydraulic ram system (34). It is therefore preferred that the surface of the slip (21) and the surface of the course wedge (30) are not flat but formed of a plurality of ridges as shown in Fig 11. Preferably, each ridge is formed of two gradients, one at 1 in 6 to the vertical (angle a) and one at a higher gradient such as 1 in 2 (angle b). When the fine wedge (29) is applied, the course wedge (30) would slip back down the 1 in 2 surfaces until the 1 in 6 surfaces were in contact, at which point slipping would stop, even if the applied force, such as the hydraulic ram (35) 15 was removed. It would thereby allow the mechanism of Figs 8 to 10 to operate in a fail safe manner without any externally applied force, once the wedges were wedged.

20 In Figs 8 to 10, the slips are shown as capable of being rotated about the axis of the tubular (22), wherein the wedge (29) and structure (25) are both supported in bearings (32) and (33), which are themselves supported in the hydraulic ram arrangement (34).

25 By such means, in Figs 8 to 10, the slips may rotate, as well as support, the drill string but the protrusions on the slips inserts should never scratch, score or gouge the surface of the tubular, a minimum gripping force can be applied to the tubular to apply the required torque even if there is inadequate weight of drill string to wedge the slips, and a wider range of diameters of the tubular bodies or tool joints can be accommodated.

504 Improved Slips An Filed  
5-Apr-02 - 15:11

- 12 -

Conventionally, the slip is usually one of three slips placed around the tubular. In this invention 3 or more are preferred. However, in the configuration shown in Figs 8 to 10, which caters for a range of diameters, it is preferred that there are a larger number of thinner slips, perhaps 5 or more, so that the slips can better contact a range of tubular curvatures.

There would be the same number of course wedges (30) as the number of slips (21). The fine wedges (29), though, whilst also being of the same number as the course wedges (30), would each form part of a continuous ring or cylinder around the course wedges, slips and the tubular and thereby contain the forces produced by wedging the slips against the tubular.

An alternative method is shown in Figs 11 and 12, whereby the fine wedges (29) are not connected to each other but are constrained to slide within a cylinder with vertical sides (35), which itself applies the circumferential tension. A further option is for this cylinder to have conical inside walls (35) to contribute to the inward movement of the slips (21) as the wedge or wedges (29) and (30) moved upwards as shown in Figs 13 and 14.

In Figs 15 to 18, a further aspect of this invention is the addition of a second set of slips (40), which can be introduced to provide a more safe and positive support of the drill string without relying on friction. This added set of slips is positioned between the shoulder of the tool joint and a conical surface in the surrounding body so that, once placed, it is impossible for the drill string to fall down the well bore.

In Fig 15 one of the set of additional slips (40) is shown retracted clear of the well bore, as is also the main slip (41). The main slip (41) is shown connected to the course wedge (50) by a key way (55). The course wedge (50) is connected to the fine wedge (49) by a keyway (51), which contains a spring in order to delay motion between the course wedge (50) and fine wedge (49).

Imprinted Slips A: Filed  
5-APR-02 15:11

- 13 -

The main slip (41) is connected to the additional slip (40) by the link (56) and the additional slip (40) is connected to the structure (45) by the link (57).

- 5 The whole mechanism is driven by a hydraulic ram (54), which acts directly on the fine wedge (49). The fine wedge (49) can be one of a plurality of fine wedges all forming part of a solid rig around the centre line of the well bore, or the fine wedges (49) can be one of a plurality of fine wedges that are not connected to each other but are constrained from moving away from the centre line of the well bore by the solid
- 10 structure (45).

In Fig 16 the additional slip (40) has been pushed into place by the downward motion of the fine wedge (49), course wedge (50) and main slip (41).

- 15 The drill string (42) can then be lowered until the shoulder (58) rests on the additional slip (40) as shown in Fig 17. The main slip (41) is then pushed inwards and contacts the surface of the tool joint (59), moving perpendicular to the said surface. This motion is achieved by the course wedge (50) sliding against the main slip (41).

- 20 When the course slip (50) cannot slide any further, the fine slip (49) begins to slide against the course slip (50) and this motion tightens the gripping force of the main slip (41) against the surface of the tool joint (59).

- The additional slip is one of a plurality of slips that encircle the tubular body (60). These slips come into contact with each other and form a strong continuous ring
- 25 around the tubular body (60), but of a larger internal diameter than the external diameter of the tubular body (60), such that no force is applied to the tubular body (60) itself. These slips and the surrounding structure (45) provide a solid and failsafe support for the drill string (42) since the larger diameter of the tool joint surface (59)
- 30 cannot pass.

504 Improved Slips (as Filed)  
5-APR-02 - 15:11

- 14 -

In Fig 18, the supporting and gripping of the drill string (42) by the additional slips (40) and main slips (41), held in place by course wedge (50) and fine wedge (49) under the applied force of the hydraulic ram (54), provides a very compact and safe solution. The applied force can be hydraulic, mechanical or electrical and, if it is required to make the gripping action fail safe as well, then a stepped surface maybe used between the course wedge (50) and the main slip (41) as previously described in Figs 11 to 14. The mechanism would continue to grip the tool joint, without any applied force, until released by the raising of the fine wedge (49) by an applied force.

The arrangement shown in Figs 15 to 18 may also be used, upside down, in a snubbing operation as previously discussed.

No page 15 needed

- 15 -

## Claims

## 1. Slips comprising :

- 5 (i) a slips bowl seatable in a table
- (ii) a plurality of pipe-gripping slips disposed in the slip bowl for radial movement therein
- (iii) a moving means for moving the slips radially whereby the moving means moves the slips into or out of contact of a tubular located within said bowl at about substantially ninety degrees to the tubular.
- 10 2. Slips as claimed in claim 1 in which the moving means comprises a wedge which contacts a sloping external surface of the slips whereby moving the wedge over the said sloping surface causes radial movement of the slips.
- 15 3. Slips as claimed in claim 2 in which there is a wedge moving means which can apply a force to the wedge to move it over the surface of the slips.
4. Slips as claimed in claim 2 in which there are a plurality of wedges between the wedge moving means and the slips with a first wedge in contact with the sloping surface of the slips and an adjacent wedge in contact with the first wedge.
- 20 5. Slips as claimed in claim 2 in which there are two wedges with first wedge in contact with the sloping surface of the slips and an adjacent wedge in contact with the first wedge and the wedge moving means and in which the first wedge is a coarse wedge and the second wedge is a fine wedge.
- 25 6. Slips as claimed in claim 5 in which there is a spring located between the first and second wedges.

504 Improved Slips As Filed  
5-Apr-02 - 15:11

- 16 -

7. Slips as claimed in claim 5 or 6 in which there are ridges on the coarse wedge, such that no acting friction slope within the slips assembly is at more than about 10 degrees to the axis of the tubular.
- 5 8. Slips as claimed in any one of claims claim 2 to 7 in which there is a link, with one end pivotally attached to the slips and the other end fixed, whereby the slips are substantially constrained by the link to move substantially at ninety degrees to the tubular at the moment of contacting or retracting from the tubular.
- 10 9. Slips as claimed in any one of the preceding claims in which the slips bowl is segmented and contained within an upside-down wedge shaped or conical bowl such that the movement of the inner segmented bowl, within the outer wedge shaped or conical bowl, allows the slips to accommodate a range of diameters of drill strings, tubulars and tool joints
- 15 10. Slips as claimed in any one of the preceding claims in which there is a second set of slips that interfere with the shoulder of the tool joint such that, once applied or set, the support of the drill string weight does not rely on friction, or indentation of the surface of the drill string, tubular or tool joint to allow the gripping of the drill string,
- 20 tubular or tool joint to be solely required to provide or resist torque, while the axial force is taken by the said second set of slips.
- 25 11. Slips as claimed in any one of the preceding claims in which the slips bowl is a wedge shaped bowl into which the slips are wedged and the bowl moves axially, in parallel with the drill string axis, while the drill string, tubular or tool joint remains static and the slips are forced into contact with the said drill string, tubular or tool joint with little or no relative motion in the direction of the axis of the drill string.
- 30 12. Slips as claimed in any one of claims 6 to 11 in which the wedge shaped bowl and slips are forced together by a mechanical, hydraulic, pneumatic or electrical force so

Approved Slips As Filed:  
5-APR-02 15:11

- 17 -

that the minimum gripping force between the slips and the drill string, tubular or tool joint can be predetermined and the gripping force does not rely on the weight of the drill string to drag the slips into the bowl.

- 5 13. Slips as hereinbefore described with reference to the drawings.

502 Improved Slips As Filed  
5-Apr-02 - 15:11

- 18 -

### Abstract

Slips for engaging any jointed, coiled or flexible tubular with substantially no scoring, gouging or scraping, such as when supporting a drill string in a borehole or gripping a tubular during the connection or disconnection of a tool joint or pulling a cable or pipeline; additionally, applying a pre-determined minimum gripping force in order to avoid rotary slippage when the weight of the string is insufficient to achieve a conventional slips action; additionally, including a coarse wedge to take up the extra travel of a worn tool joint or a tubular of smaller diameter, with a means to ensure that the coarse wedge acts before the fine wedge does and a means to ensure that the wedging action remains if the actuating force is removed; additionally, including a second slips to interfere with the upset on the tool joint to avoid relying on friction to support the string and a means of integrating this with the gripping slips and ensuring that the secondary slips act first; additionally, the application of these attributes 'upside down' to achieve the action of snubbing when forcing a tubular into compression instead of tension for any reason.



1/8

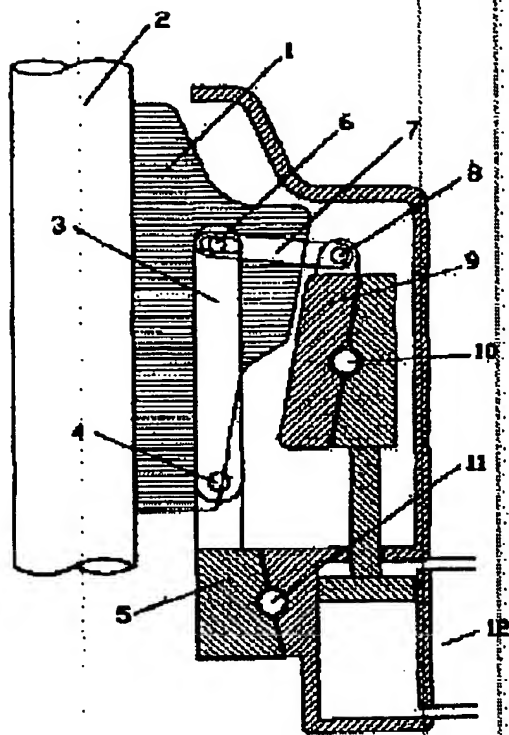


Fig. 1

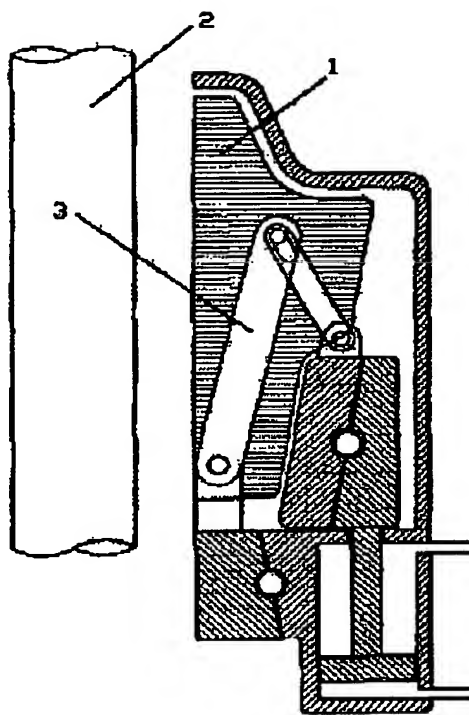


Fig. 2

**THIS PAGE BLANK (USPTO)**

2/8

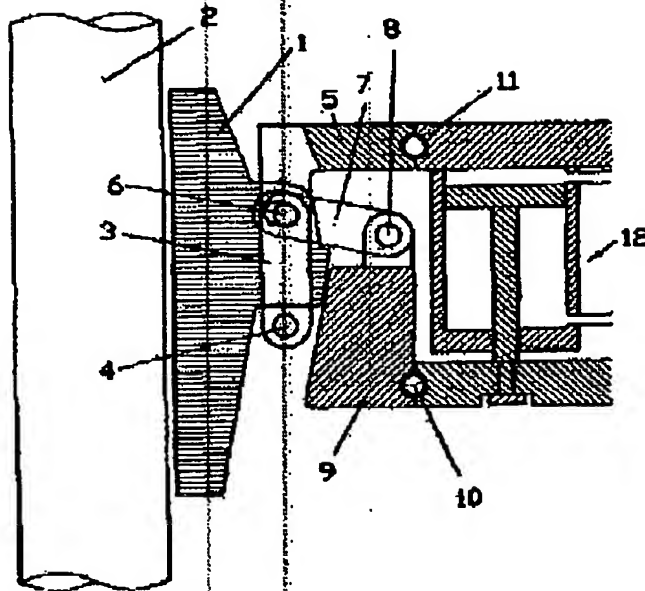


Fig. 3

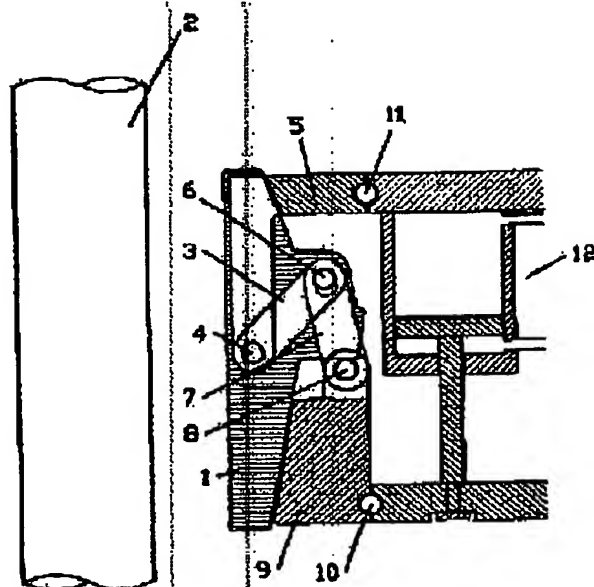


Fig. 4

**THIS PAGE BLANK (USPTO)**

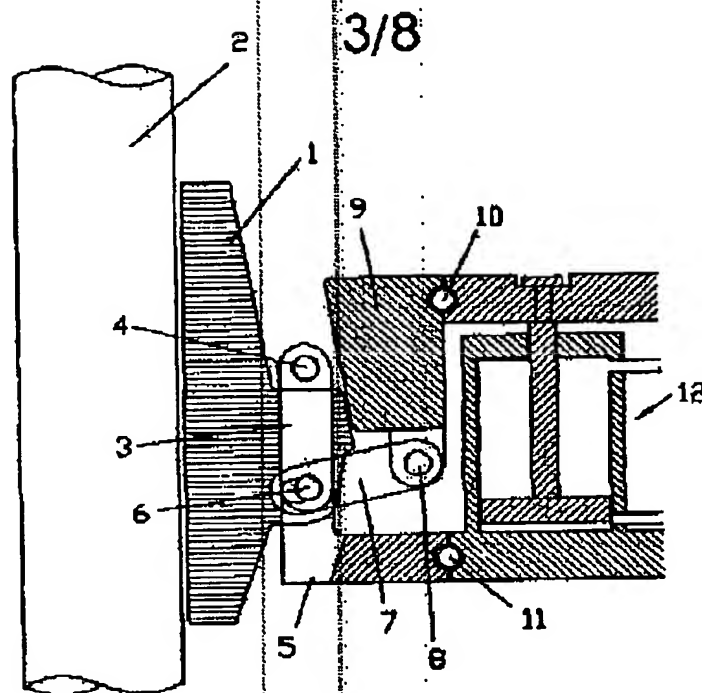


Fig. 5

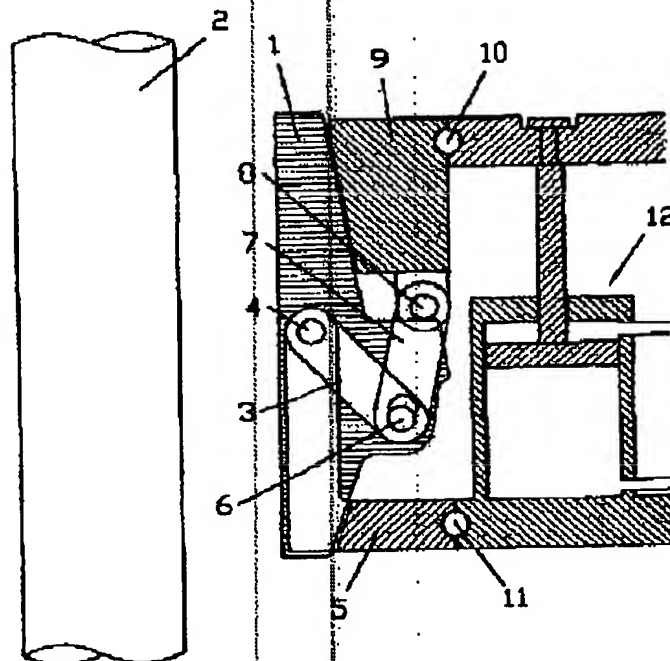


Fig. 6

**THIS PAGE BLANK (USPTO)**

4/8

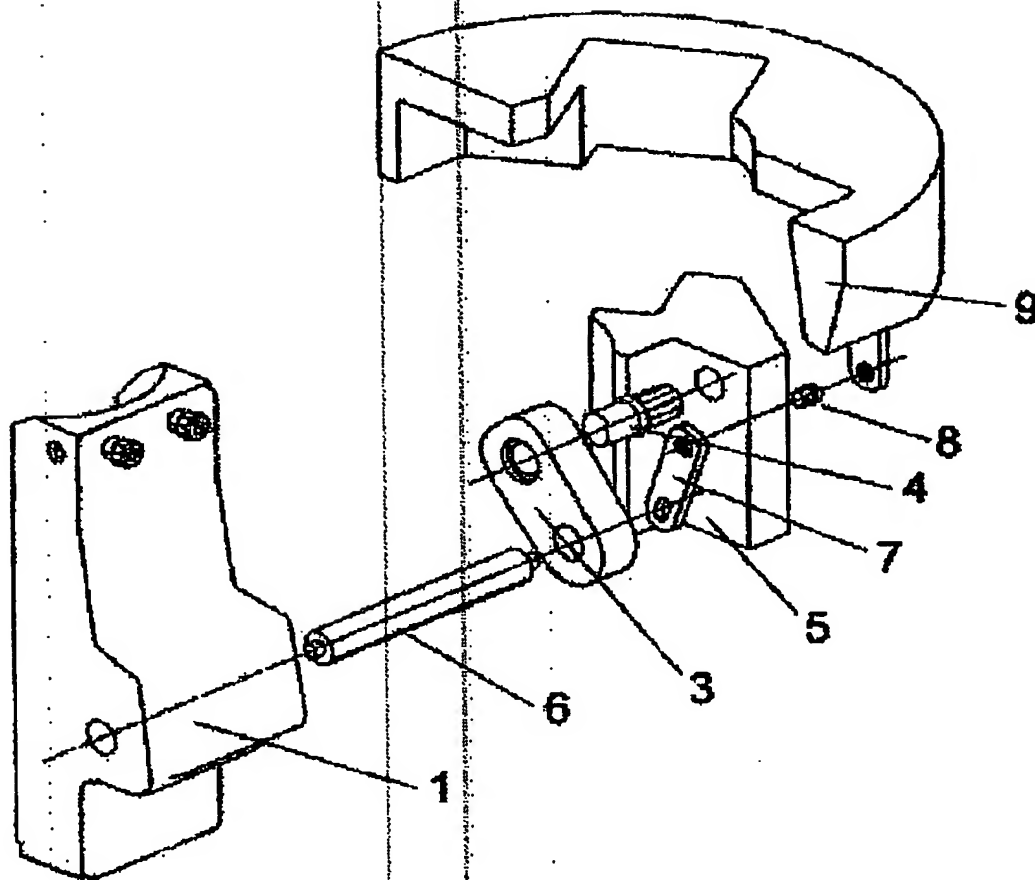


Fig. 7

**THIS PAGE BLANK (USPTO)**



5/18

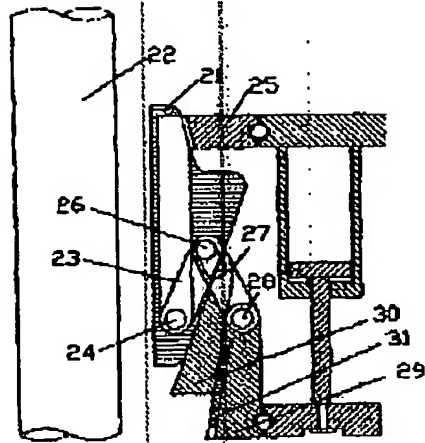


Fig. 8

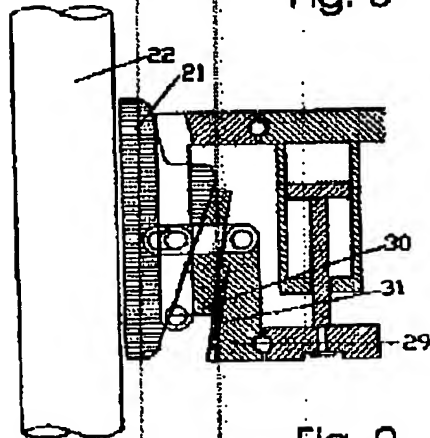


Fig. 9

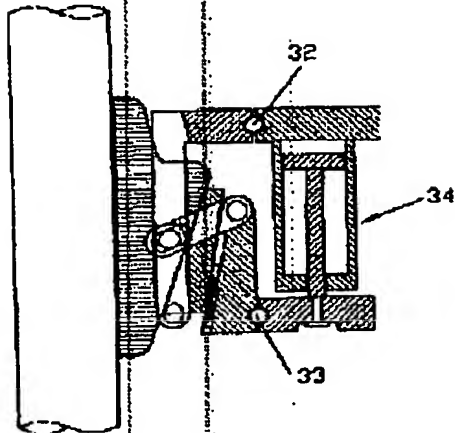


Fig. 10

**THIS PAGE BLANK (USPTO)**

6/8

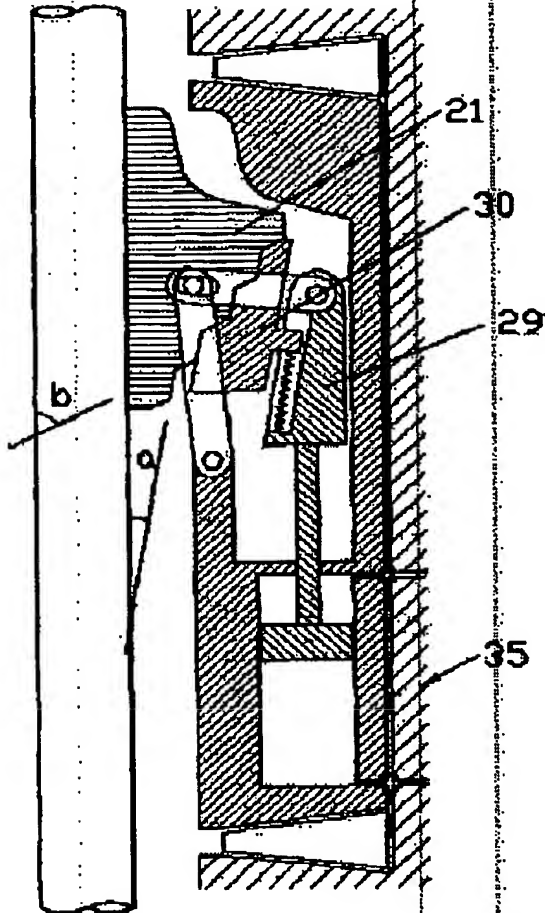


Fig. 11

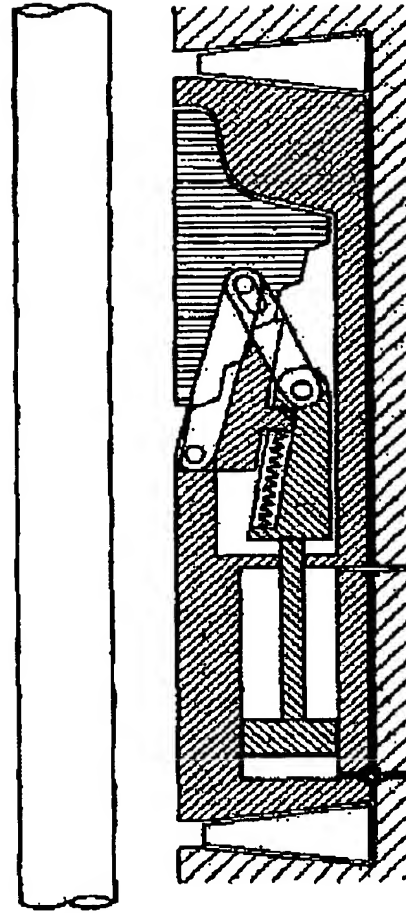


Fig. 12

**THIS PAGE BLANK (USPTO)**

7/8

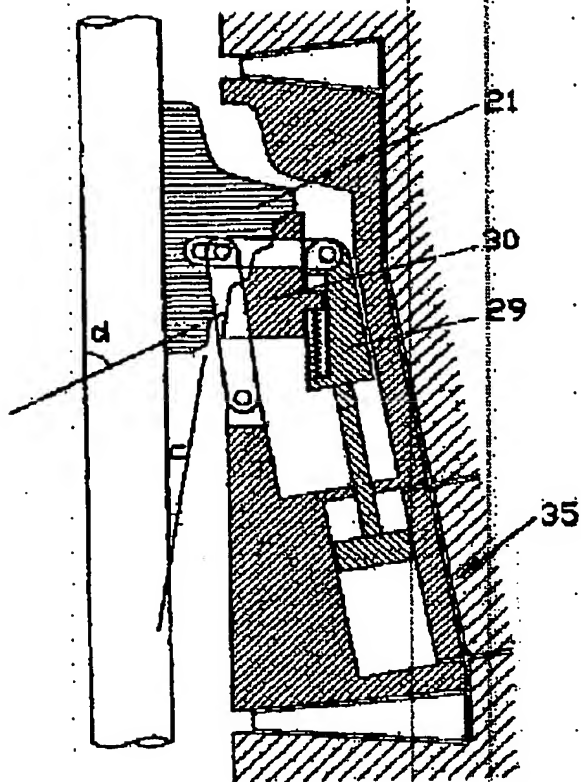


Fig. 13

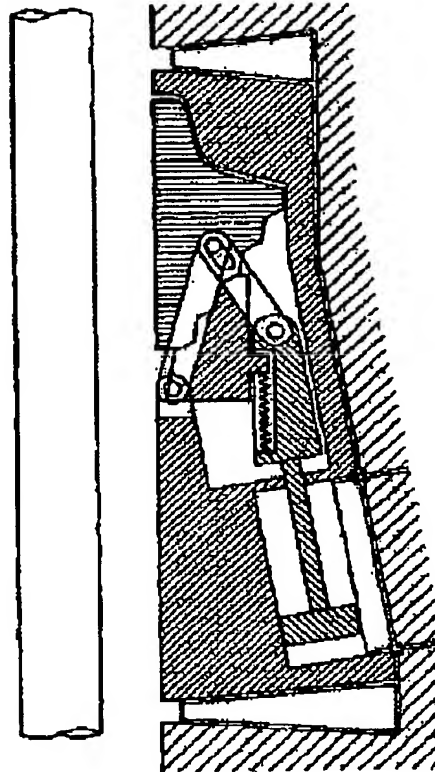


Fig. 14

**THIS PAGE BLANK (USPTO)**

8/8

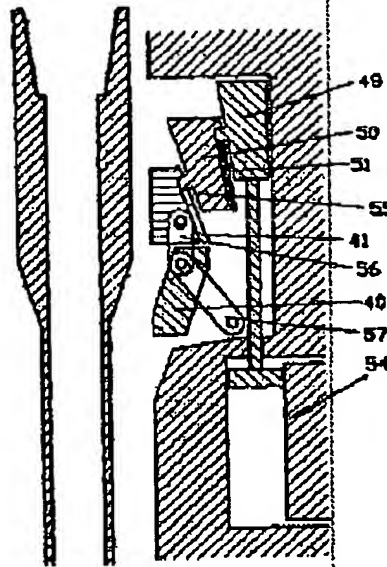


Fig. 15

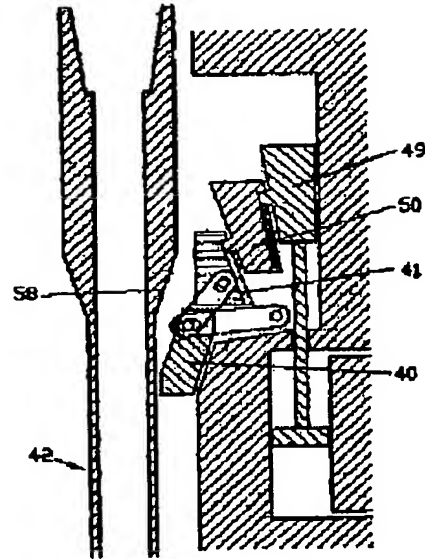


Fig. 16

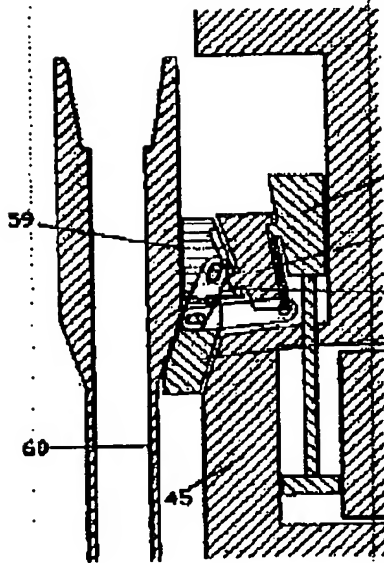


Fig. 17

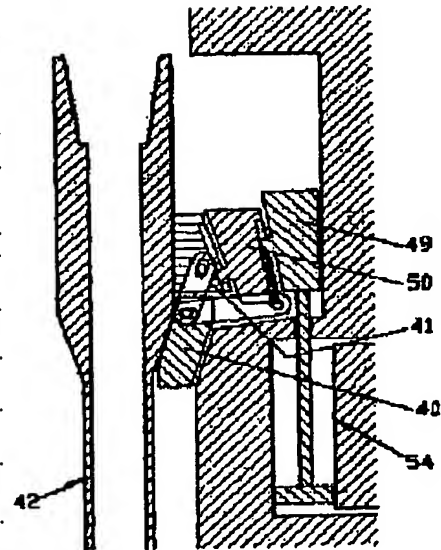


Fig. 18

**THIS PAGE BLANK (USPTO)**



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ BLACK BORDERS

☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES

☐ FADED TEXT OR DRAWING

☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING

☐ SKEWED/SLANTED IMAGES

☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS

☐ GRAY SCALE DOCUMENTS

☒ LINES OR MARKS ON ORIGINAL DOCUMENT

☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**